

# Café au Lä®

THE WINDSCREEN THAT RISES ABOVE THE AVERAGE




## Protection and comfort for your restaurant guests

Shelter your guests from all the hassles of outdoor dining. Cold winds, harsh weather and theft are just some of the negative elements that distract restaurant guests from dining or having coffee in an open air-environment. Café au Lä® windscreen provides protection against all these elements, making outdoor dining more comfortable.

Café au Lä® is the easily adjustable windscreen for restaurant terraces. Guests can decide the height they want of the windscreen, whether they want to have an intimate atmosphere or want to be a part of what is going on outside. Made from aluminium, the standard design is equipped with laminated safety glass.


It is available in several variants that all can be combined in the same installation. As a fixed railing, as height adjustable windscreen, with fixed overhead glass or as SPLIT for a complete glassed-in terrace or balcony. Café au Lä® is also available with electric operation, without counterweight.

Café au Lä® is tested for wind load and personal safety including heavy impacts by the RISE – Research Institutes of Sweden. Café au Lä® is also CE marked according to EN 1090 and thereby approved for installation on balconies and terraces where there is a risk of falls and injuries.



**RISE**  
Research Institutes  
of Sweden

## EXAMPLE OF VERSIONS

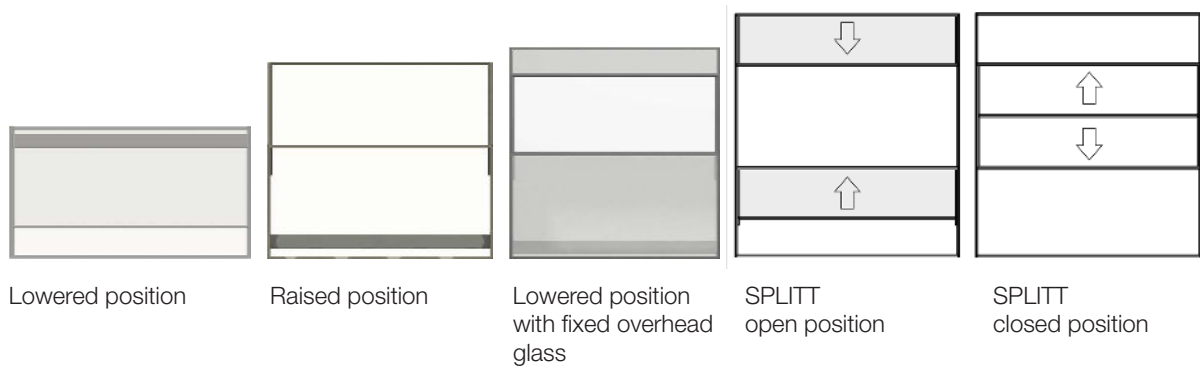

## TECHNICAL SPECIFICATIONS

|                      |   |
|----------------------|---|
| WIDTH                | Maximum 2200 mm per section*.<br>Refers to fixed railings and standard height adjustable screens. For SPLITT performance, see below.<br>*Note that the maximum width might be affected based on the conditions of wind load in the area and the installation height.  |
| HEIGHT               | Standard heights (lowered position/raised position):<br><ul style="list-style-type: none"> <li>• 800/1300 mm</li> <li>• 900/1500 mm</li> <li>• 1000/1700 mm</li> <li>• 1100/1900 mm</li> <li>• 1200/2100 mm</li> </ul> For the U.S. market, available heights are also:<br>36/60", 42/72" (max. width 86"), 46/80" (max. width 80") |
| THICKNESS            | 90 mm   |
| OVERHEAD FIXED GLASS | Standard overhead fixed glass is delivered with extended posts to be attached on the existing glazing but it is also available without side posts. Attachment is made on the sides and/or upwards to, for example, ceiling or pergola.  |
| SPLITT               | SPLITT is a version of height adjustable glazing for environments where you can attach the glazing upwards against a ceiling, balcony, pergola etc. With SPLITT you get a complete glazing with maximum opening area thanks to the two movable panes that open both upwards and downwards.  |
| WIDTH SPLITT         | Maximum 2500 mm   |
| HEIGHT SPLITT        | Maximum 3500 mm   |
| GLASS                | 6 mm laminated safety glass in standard performance. Frosted or patterned foil, grey glass or other materials is available as an option.  |
| SURFACE COATING      | Satin anodized aluminium is standard. Available as an option is powder coated in white, black or any standard RAL colour.   |
| INSTALLATION         | There are several types of feet for installation. There are also several connectors for corner and wall attachment. All connectors and feet are made of stainless steel.  |
| OPTIONS              | Interval locking at optional height.  |
| MANUFACTURED BY      | Lock with key for lowered and/or raised position.<br>Svalson AB, Sweden   |

Visit [svalson.com](http://svalson.com) for more information.

*Design and material subject to change without prior notice.*

