

# CITILÄ®

THE WINDSCREEN THAT RISES ABOVE THE AVERAGE




## Make better use of your outdoor area

With Cit i Lä® in your patio, you can enjoy more outdoor activities with your friends and family during early spring and even late autumn. With Cit i Lä®, you have the option of an open veranda when the weather is nice and sunny. Just raise up the adjustable screens when you need protection from harsh weather and cold winds.


The terrace screen system is designed to make it easy and flexible to use and can be raised and lowered with a simple grip. Made from aluminium, the standard design is equipped with laminated glass, both in the lower fixed part and in the height-adjustable part.

Cit i Lä® is available in several variants that all can be combined in the same installation. As a fixed railing, as height adjustable windscreen, with fixed overhead glass or as SPLITT for a complete glassed-in terrace or balcony.

Cit i Lä® is tested for wind load and personal safety including heavy impacts by the RISE – Research Institutes of Sweden. Cit i Lä® is also CE marked according to EN 1090 and thereby approved for installation on balconies and terraces where there is a risk of falls and injuries.



## EXAMPLE OF VERSIONS

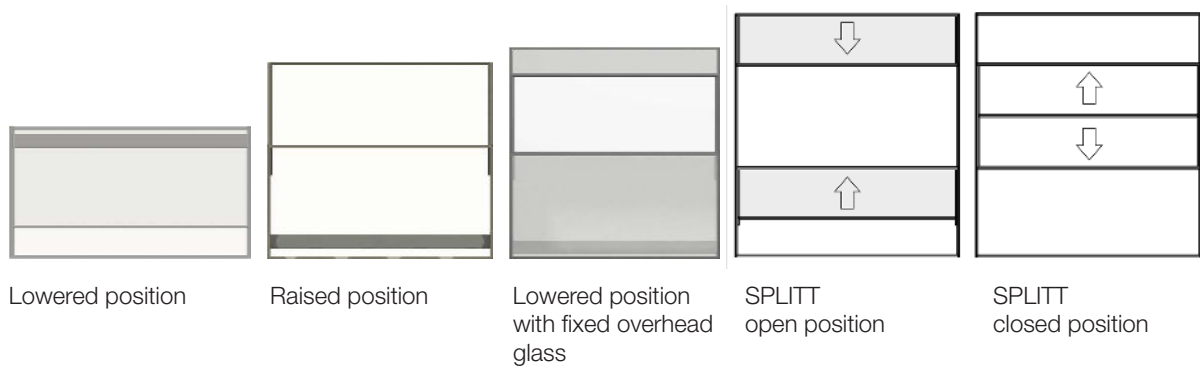

## TECHNICAL SPECIFICATIONS

WIDTH	<p>Maximum 2200 mm per section*. Refers to fixed railings and standard height adjustable screens. For SPLITT performance, see below. <i>*Note that the maximum width might be affected based on the conditions of wind load in the area and the installation height.</i></p>
HEIGHT	<p>Standard heights (lowered position/raised position):</p> <ul style="list-style-type: none"> <li>• 800/1300 mm</li> <li>• 900/1500 mm</li> <li>• 1000/1700 mm</li> <li>• 1100/1900 mm</li> <li>• 1200/2100 mm</li> </ul> <p>For the U.S. market, available heights are also: 36/60", 42/72" (max. width 86"), 46/80" (max. width 80")</p>
THICKNESS	90 mm
OVERHEAD FIXED GLASS	Standard overhead fixed glass is delivered with extended posts to be attached on the existing glazing but it is also available without side posts. Attachment is made on the sides and/or upwards to, for example, ceiling or pergola.
SPLITT	SPLITT is a version of height adjustable glazing for environments where you can attach the glazing upwards against a ceiling, balcony, pergola etc. With SPLITT you get a complete glazing with maximum opening area thanks to the two movable panes that open both upwards and downwards.
WIDTH SPLITT	Maximum 2500 mm
HEIGHT SPLITT	Maximum 3500 mm
GLASS	6 mm laminated safety glass in standard performance. Frosted or patterned foil, grey glass or other materials is available as an option.
SURFACE COATING	Satin anodized aluminium is standard. Available as an option is powder coated in white, black or any standard RAL colour.
INSTALLATION	There are several types of feet for installation. There are also several connectors for corner and wall attachment. All connectors and feet are made of stainless steel.
OPTIONS	Interval locking at optional height. Lock with key for lowered and/or raised position.
MANUFACTURED BY	Svalson AB, Sweden

Visit [svalson.com](http://svalson.com) for more information.

*Design and material subject to change without prior notice.*

