

# AH60

CE




2024.27 (eng)

## Horizontally sliding window for indoor or outdoor installations

Robust, horizontally sliding, electrically operated window for both indoor and outdoor installation. The sliding window has an aluminium frame and can be equipped with up to 20 mm thick safety or insulating glass. In its standard version, the sliding window is satin anodized and equipped with D4-12 double glazing. The frame can be finished by powder coating, anodizing in other colours or stainless steel cladding. The sliding window is automatically locked in closed position and at intervals across the entire opening width. Operated by control switch with hold to run buttons.

## EXAMPLES OF VERSIONS

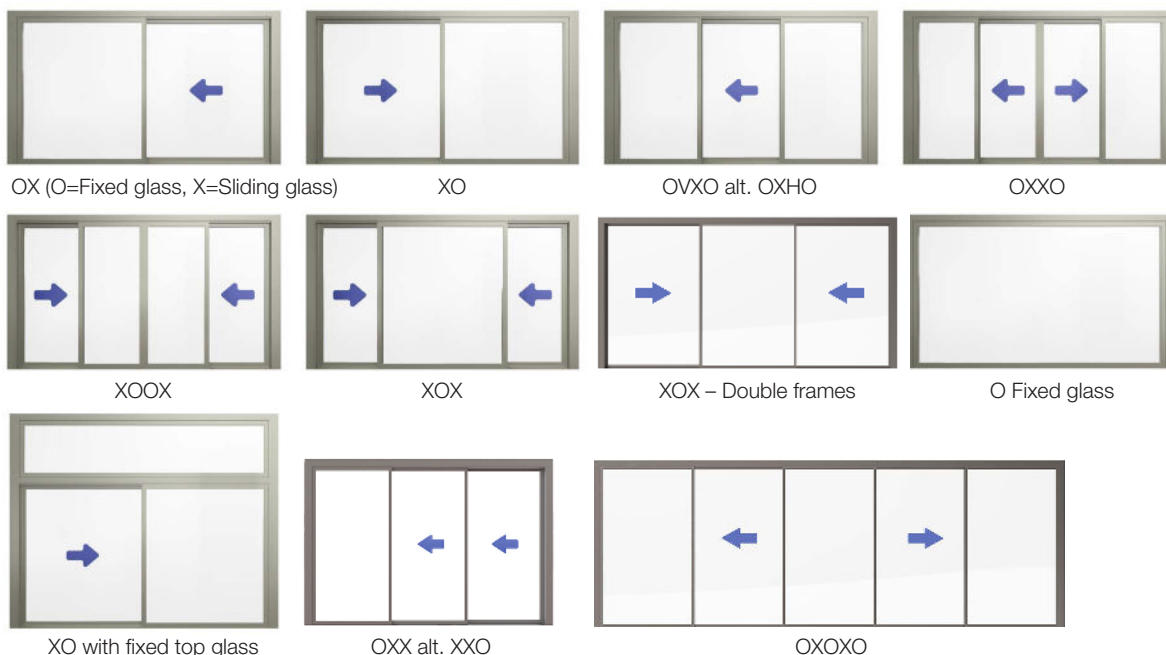

## TECHNICAL INFORMATION

NAME	AH60
DESCRIPTION	Robust, horizontally sliding, electrically operated window for indoor and outdoor* installation. *Prior to mounting the unit in outer facade make sure that the installation is provided with adequate drainage.
WIDTH	Customers choice.
HEIGHT	Customers choice.
FRAME THICKNESS	60 mm
WIDTH SIDE POSTS	50 mm (53 mm on windows with overhead light).
HEIGHT TOP PROFILE	45 mm (50 mm on windows with overhead light).
HEIGHT OF BOTTOM PROFILE	5 mm plus a 6 mm guide.
GLASS FRAMES	30 mm
CONSTRUCTION	Motor, transmission and automatic locking are integrated within the frame.
LOCKING	Mechanical lock which automatically locks the window in closed position and at 50 mm intervals across the entire opening width. Options: key lock.
POWER SUPPLY	230 V AC transformer. Options: battery backup.
CONTROL SYSTEM	S3 control system with soft start/stop and hold-to-run buttons as standard. Adjustable speed, one-touch buttons, alarm closing and various control switches are available as options.
OPENING SPEED	Approx. 200 mm/sec.
GLASS	D4-12 double glazing is standard. Other glass up to 20 mm thick is available as an option, such as 14 mm, impact-resistant laminated glass, class P6B.
SURFACE COATING	Satin anodized aluminium is standard. Other surface coatings available as an option are powder coating, anodizing in various colours and stainless steel cladding.
MANUFACTURED BY	Svalson Safety AB, Sweden

Visit [svalson.com](http://svalson.com) for more information.

*Design and material subject to change without prior notice.*

